


Interlocking Floor Tiles

Black TPE floor tiles for tents, terraces, garages and event areas

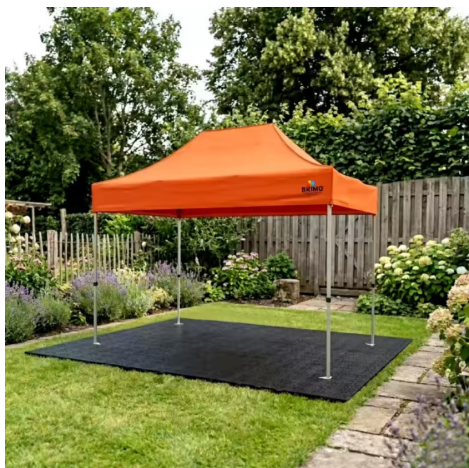

Floor laid under a pop-up tent

Modular floor tiles made of TPE – soft like rubber and stable like plastic. They connect with a click system without tools and create a clean, dry and stable floor under your tent, even on uneven ground.

Tile size	304.8 × 304.8 × 12.7 mm
Tile weight	0.45 kg
Coverage	10 tiles = 0.93 m ²
Material	TPE, black, UV and moisture resistant
Slip resistance	R9
Temperature	–20 °C to +70 °C
Load	up to 15 t/m ² on a firm, suitable base


Package contents

- Floor tiles according to the ordered tent size, packed in cartons

Installation and use

- 1 Prepare the base**
Choose a firm, level surface. Remove stones, branches and sharp objects.
- 2 Start in a corner**
Lay the first tile in one corner of the area with the connectors facing outwards.
- 3 Connect**
Place the next tile next to it and press the connectors together until they click. Continue row by row.
- 4 Finish**
Check that all joints are closed and the floor lies flat. Two persons can lay about 50 m² in 10 minutes.
- 5 Set up the tent**
Place the tent on the floor and anchor every leg with weights, sand or water bags.

Note: You can lay the tiles in any shape, e.g. an L-shape.

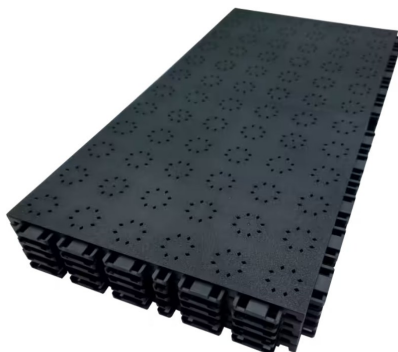

TPE tiles with click connection

Safety instructions

For this product

- The floor does not anchor the tent. Always anchor the tent separately.
- Wet, icy or dirty tiles can be slippery. Keep the surface clean and dry.
- The edges of the floor can be a tripping hazard – mark them in public areas.
- Heavy loads (e.g. cars) only on a firm, load-bearing base.
- Keep away from open fire, grills and hot objects.

General

- Always anchor the tent properly (weights, sand or water bags, pegs or ropes) before use.
- Take the tent and its accessories down before strong wind, storm, heavy rain, snow or hail. Never leave them installed unattended or overnight in bad weather.
- Never let rain water collect on the roof or any fabric part – remove accumulated water immediately and keep all fabric fully tensioned so water runs off.
- Keep children away during installation and do not let them play with the parts.
- Check all parts before every use and replace damaged parts. Use only original BRIMO parts.

Care and storage

- Rinse with water; use a mild detergent for heavy dirt.
- Let the tiles dry before stacking them in the cartons.

The manufacturer is not liable for damage caused by wind, rain, snow, accumulated water, insufficient anchoring or by not following these instructions.